



VIVAX
METROTECH

vLoc Series 2

- Smaller and lighter
- Over four times battery life
- Define, set and lock available features
- Customizable startup screen
- and much more...



Locate with Accuracy and Confidence



vLocPro2

vLocPro2




vLocPro2 builds on the features of the original vLocPro to enhance productive location

- ▶ Rugged ABS & carbon fiber construction
- ▶ IP54 rating for all weather use
- ▶ Color display
- ▶ High speed dual core processor
- ▶ Multiple location modes with compass orientation
- ▶ Multiple frequencies (over 70)
- ▶ Push button and continuous depth/current (feet or meters)
- ▶ Normal & modulated audio modes (separately selectable for Power, Radio & Active modes)
- ▶ Signal direction to aid line identification
- ▶ Selectable languages (over 20)
- ▶ Selectable "time off" function
- ▶ Rechargeable and alkaline battery packs
- ▶ Optional Bluetooth and GPS
- ▶ Optional A-frame and remote antenna

vLocPro2 adds the following features

- ▶ Plug & play **Bluetooth** (Customer can install)
- ▶ **Weighs much less** than the previous vLocPro
- ▶ **Triangulation depth**
- ▶ Lithium ion batteries (plus new battery management software) ***over x4 battery life**
- ▶ **MyLocator2** configuration management tool for vLoc Series 2

(*Comparison between vLocPro with NiMH and vLocPro2 with Lithium ion rechargeable battery pack at 72°F)

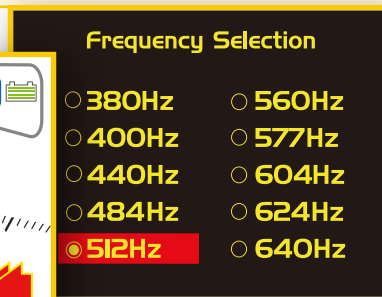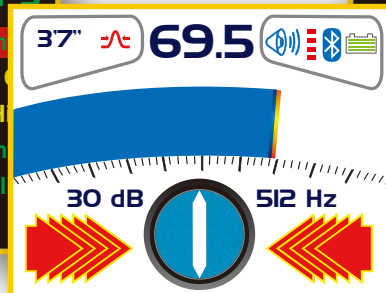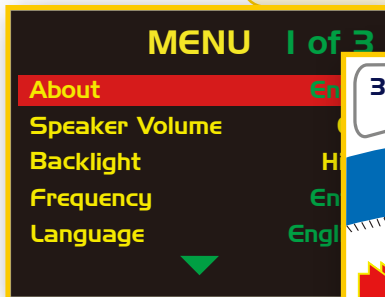


vLocML2

vLocML2

vLocML2 includes all the features available in vLocPro2 plus:

- ▶ Location of passive EMS© style markers used by utilities to mark underground assets
- ▶ Color coded signal strength indication
- ▶ Dedicated line locate mode
- ▶ Dedicated marker locate mode
- ▶ **Simultaneous** line and marker locate mode

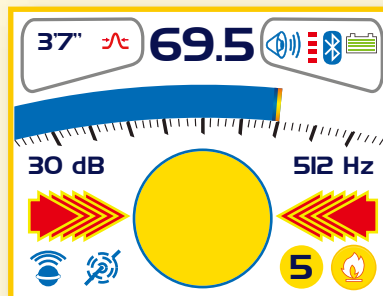

for general utility location, utility mapping, pipeline


The use of GPS with locators is increasing in our industry. The vLoc's compatibility with a wide range of GPS units enables the user to choose a GPS to suit the degree of accuracy required for the budget available.

GPS & the vLoc Series 2 provide:

- ▶ Combined GPS location with locate data (such as depth, current etc)
- ▶ Date & time stamping – proving when the locate was done
- ▶ Collection of location data for incorporating in map databases or reporting
- ▶ Useful management data for planning & productivity assessment

Bluetooth & GPS:

- ▶ New Plug & Play Bluetooth module that can be installed by you
- ▶ Greatly improved internal data-logging capability
- ▶ Compatible with a wide range of GPS receivers
- ▶ New fast upload software suits most of the popular file formats (.xls, .txt, .kml, .shp)
- ▶ Real time on screen GPS data appears with Depth & Current display on Locator

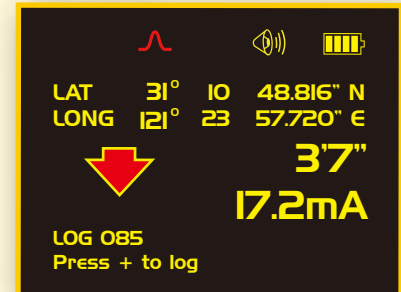

vLocPro2 Measure# 1

Date=06/21/2011
Time=04:17:36
Distance=0.00ft
Depth=3.06ft
Current=0.080A
Frequency=512Hz
Mode=peak
SD=+

MyLocator2 – Configuration Management Tool

New with the vLoc Series 2 – the MyLocator2 Configuration Management Tool is a desktop/laptop utility that enables:

- ▶ Uploading data from the locator to a computer
- ▶ Downloading of software to the locator
- ▶ Updating of both desktop/laptop and locator software (get new features as we develop them)
- ▶ Start up screen customization – add a message, telephone #, Plant #, or any picture to your locator
- ▶ Unit configuration – select/deselect features. Manage the features and modes available to the user, “deselect” unwanted features/modes and lock using a “lock-out dongle” (available from Vivax-Metrotech) – only you (with the dongle) can re-select that feature. These selections can be saved on your computer as a configuration file (.vmcfg). That configuration can then be installed on multiple units. Or – without the dongle - simplify the locator menus by removing what features you don't use, you can always reinstate them at any time.





Transmitters


A wide range of transmitters are available for use with the vLoc receivers.

- ▶ **Loc-1Tx** (1 watt) transmitter is a three frequency transmitter for short range applications
- ▶ **Loc-5Tx** (5 watt) transmitter has multiple frequencies, signal direction and sheath fault locating modes
- ▶ **Loc-10Tx** (10 watt) transmitter has our maximum number of frequencies and a *true 10W of output*, together with signal direction and sheath fault locating modes
- ▶ **Loc-150Tx** (150 watt) transmitter is used primarily with the vLocDM2 – however it is also useful for those needing a low frequency – high output transmitter.
- ▶ **FLS Tx** – generally supplied for rack mounting (also available as a ruggedized portable unit) this transmitter is used mainly for communication cables (such as fiber optic lines with metallic sheath). It can be integrated into line management systems and can be accessed via a telephone line, order wire or internet protocol.
- ▶ The Loc-5Tx and Loc-10Tx can transmit 2 frequencies simultaneously.

The Loc-1Tx, Loc-5Tx, Loc-10Tx have internal batteries. The Loc-150Tx is externally powered by 100-240AC, 12V DC, 30-60V DC. The FLS again is externally powered with 50V DC (standard) or 100-240V AC (option). See the relevant transmitter data sheets for a full details of features and performance.



Loc-1Tx




Loc-5Tx



Loc-10Tx



Loc-150Tx

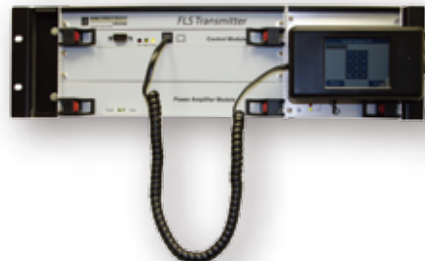

FLS

vLocCam2

The vLocCam2 is a locator configured for use with CCTV inspection cameras (transmitting 512Hz/640Hz location signals) and a range of battery powered Sondes. (Sondes are small self contained transmitters which are pushed through pipes to find blockages or locate the position and depth of the pipe from the surface. Low frequency Sondes - 512Hz or 640Hz will radiate through both plastic and cast iron pipes. Higher frequency Sondes - 8 kHz or 33 kHz - are used mainly for plastic pipes or ducts).

Vivax-Metrotech manufactures a range of CCTV inspection cameras such as the vCamModular.



vLocCam2



vCam

Call for vCam CCTV
Inspection brochure.

Sondes

Battery powered self contained transmitters.



Dia. 0.7" (18mm)
Range 12ft (4m)



Dia. 1.5" (38mm)
Range 15ft (5m)




Dia. 2.5" (64mm)
Range 24ft (8m)



Dia. 1" (23mm) flexible
Range 20ft (7m)

A-frame

For detecting the position of ground/sheath fault.



Charging Lead (12V DC)

12ft (4m) long lead to charge the receiver battery in a vehicle.



Remote Antenna

Used for cable identification.



Bluetooth

Enables Bluetooth connectivity to other Bluetooth devices such as GPS antennas. The Bluetooth module can be retrofitted to vLoc series 2 receivers by the user.




GPS

Vivax-Metrotech Bluetooth is compatible with many other GPS units including high accuracy GPS.



10ft (3m) accuracy



3ft (1m) accuracy

Rechargeable Battery and Charger

Lithium ion rechargeable battery pack and charger



Transmitter Accessories (specify model of transmitter when ordering accessories)

VM-Clamps

To apply the transmitter signal to a target cable when no access to the conductor is possible. Dia. 2" (50mm), dia. 4" (100mm), dia. 5" (125mm), 18" flexible (450mm).



LPC Separation Filter

To apply the transmitter signal to cables carrying up to 240V AC.



Loc-10Tx - Power Lead (12V DC)

30ft (10m) lead to power the transmitter from a vehicle.



Rechargeable Battery Packs and Chargers

Loc-5Tx (5 watt transmitter)

Loc-10Tx (10 watt transmitter)

NiMH rechargeable battery packs and chargers

